





# HURRICANE C300

## SPECIFICATIONS

ENGINE	
Manufacturer & Model	CUMMINS B6.7 TIER 4 STAGE V
Cylinders & Displacement	6 cylinders / 408 CID (6.7 L)
Peak Power at 1,800 rpm (SAE J1995)	282 hp (210 kW)
Net Peak Torque	950 ft.lbf (1 288 Nm)
Fan	Automatic variable pitch, reversible
HYDRAULICS	
Pump System	4
Filtration	10 Microns
ELECTRICAL	
Voltage	12 Volts
Standard Light	8 LED type (4 Front, 2 Side, 2 Rear)
SERVICEABILITY	
Fuel Tank	105 gal US (394 L)
Hydraulic Reservoir	43 gal US (163 L)
Cooling System	12 gal US (45 L)

UNDERCARRIAGE & GROUND PRESSURE	
Chain Type & Size	D4 seal and grease
Track Shoe & Rollers	Standard 24 in (610mm) Option 30 in (760mm) Single grouser with mud hole Dozer type rollers
Ground Pressure (Crawler only, 30 in pads)	3.24 psi (0.23 kg/cm <sup>2</sup> )
Weight (Crawler only, 30 in pads)	24 800 lb (11 250 kg)
Ground Pressure (Crawler only, 24 in pads)	3.96 psi (0.27 kg/cm <sup>2</sup> )
Weight (Crawler only, 24 in pads)	24 250 lb (11 000 kg)
TOP SPEED	
Motor	Two speed hydraulic motors
Speed	3.8 mph (6km/h)
STANDARD CHARACTERISTICS	
- Push button cab lift with manual override	- Air suspension seat
- Backup camera	- ROPS/FOPS/OPS Certification
- AM/FM/Bluetooth radio	- 15 000 lb winch
- Hydraulic oil filler pump	- 12 Volts DC outlet

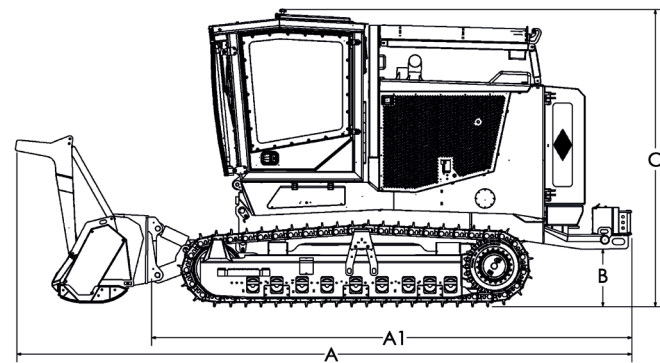

### MACHINE DIMENSIONS

A - Overall Length with mulcher head (\*): 257 in (653 cm)

A1 - Overall Length: 197 in (500 cm)

B - Ground Clearance: 24 in (61 cm)

C - Overall Height: 124 in (314 cm)

D - Overall width, 30 in (760 mm) pads: 89 in (226 cm)

D - Overall width, 24 in (610 mm) pads: 83 in (210 cm)

E - Mulching head overall width (\*): 106.9 in (272 cm)

(E-2F) - Mulching head working width (\*): 90.7 in (231 cm)

(\*) - Specs for FAE 200U225 head; Dimensions will vary if other type of head is selected

CMI Mulching inc.  
1200 Chemin Herman-Lavigne | Saint-Cyrille-De-Wendover, QC, Canada J1Z 1S4  
819 397-2288 | [www.cmimulching.com](http://www.cmimulching.com)

C.M.I. reserves the right to change specifications, design and price of products described in this literature without notice. C.M.I. and C300 are registered trademarks of C.M.I. Danri inc. Printed in Canada.

# HURRICANE C300



The Mulching Specialists

PERFORMANCE | RELIABILITY | SIMPLICITY



# HURRICANE C300

THE LEGENDARY FRAME OF THE HURRICANE  
PERFECTLY BALANCED  
LIGHT WEIGHT  
RESISTANT TO YEARS OF ABUSE IN THE HARDEST APPLICATIONS  
DECADES OF PROVEN EXPERIENCE, CUSTOMER SATISFACTION  
AND CONTINUITY IN DESIGN

## NEW CAB



NEW DIGITAL SCREEN FOR EASY  
DATA ACCESS AND DIAGNOSTIC

NEW ERGONOMIC LAYOUT

12 VOLTS DC OUTLET



PUSH BUTTON CAB TILT FOR  
EASY ACCESS TO COMPONENTS  
& HYDRAULIC OIL FILLING PUMP

AM/FM/BLUETOOTH RADIO

AIR SUSPENSION SEAT

PRESSURISED CABIN WITH  
INTEGRATED HEAVY DUTY  
PRE-CLEANER



GREAT VISIBILITY

**PERSONALIZED CONFIGURATION:**  
CONFIGURE WITH S250 STUMP  
GRINDER OR THE TYPE OF  
MULCHING HEAD THAT FITS YOUR  
APPLICATION BEST

OUR CANOPY GIVES AN  
EXTRA PROTECTION AGAINST  
FLAMMABLE DEBRIS



HIGH EFFICIENCY COOLING  
PACKAGE WITH COARSE FINS  
FOR EASY CLEANING

15 000 LB WINCH

THE C300 USES THE CUMMINS  
B6.7 DELIVERING OPTIMAL FUEL  
EFFICIENCY, BETTER CONTROL  
AND PERFORMANCE IN THE  
MULCHING PROCESS

DOZER TYPE ROLLERS  
IMPROVED TRACTION POWER FOR BETTER  
MANOEUVRABILITY IN SOFT AND STEEP TERRAIN  
FULL ROCK GUARD PROTECTION

